





FICHA TÉCNICA

CONECTOR RECTO HERMÉTICO UL

Estándar Material

- Fundición a presión de zinc

SKU	Código Ref.	Medida	Dimensiones en pulgadas			
			A	B	C	D
			±0.005	±0.005	±0.005	±0.005
053701003	SLT-050I	1/2"	0.706	17.93	0.80	4.00
053701002	SLT-075I	3/4"	0.922	23.42	0.90	4.50
053701049	SLT-100I	1"	1.163	29.54	1.00	5.75
053701047	SLT-125I	1-1/4"	1.510	38.35	1.30	7.25
053701004	SLT-150I	1-1/2"	1.740	44.20	1.30	8.25
053701008	SLT-200I	2"	2.197	55.80	1.30	9.50

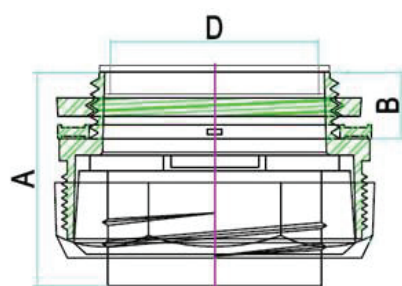

Consulte al fabricante para una instalación adecuada.



• Uso:

Para terminar y sellar un conducto metálico flexible hermético a líquidos en una caja o recinto hermético al aceite, a los líquidos o a la lluvia. Los conectores se pueden utilizar con entrada hembra con rosca cónica o sin rosca.

